

User manual

version 1.1

DALInet



DALI / Ethernet converter

Power supply passive PoE or 9-32V

Indication of communication on the DALI


Galvanic separation DALI/ETH

DIN rail mount (2 modules)

Technical specification

bus	DALI / Ethernet	
speed (ETH)	10/100M	
protocol (ETH)	TCP/IP	
Power supply	9-32	V
Power consumption	1,5	W
	50-150 (power supply 32-9V)	mA
Power consumption (from DALI bus)	1,2	mA
Wires cross section	0,08 – 1,5	mm ²
Ingress protection rating	IP20	
Galvanic isolation DALI/ETH	4	kV
Working ambient temperature	0 ÷ 50	°C
Storage temperature	-10 ÷ 50	°C
weight	80	g

Consumption depending on voltage supply

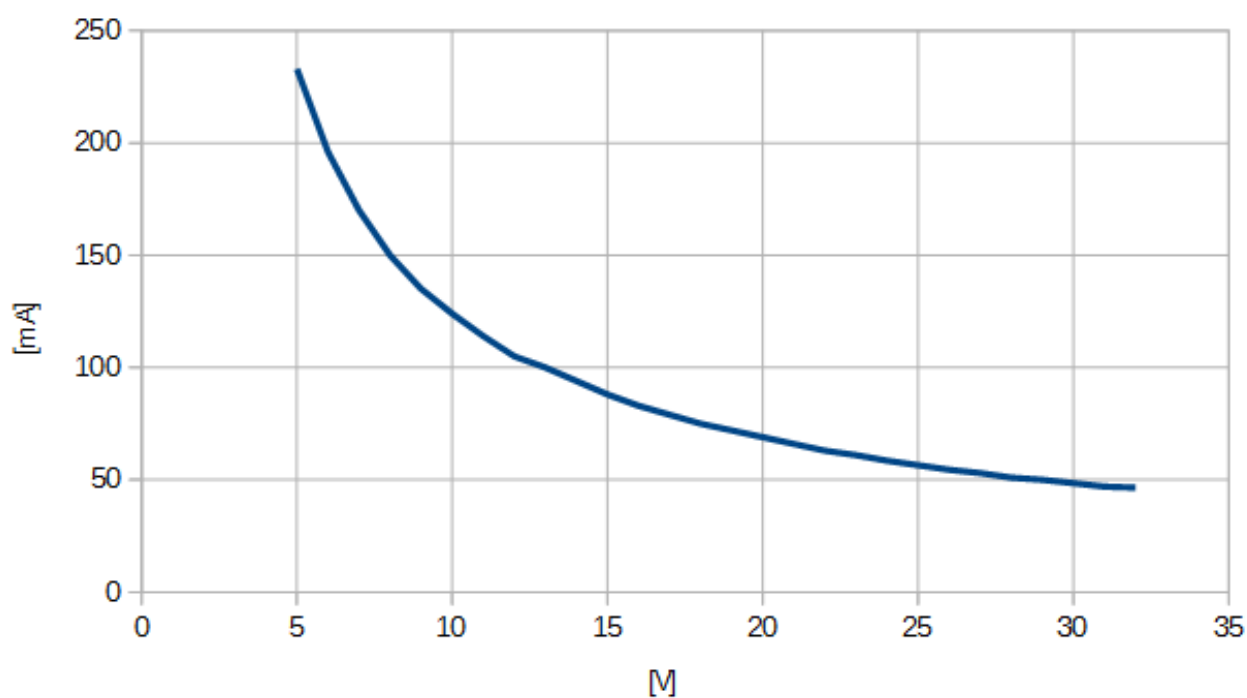

Function

DALInet supports two protocols. Simple **ASCII** protocol and **Modbus**. Both protocols are available at once.

ASCII protocol

Communication with DALInet converter is done by serial line RS232 using simple ASCII protocol. This protocol is described in separate datasheet which is downloadable on www.foxtron.eu.

Through the agency of the converter DALInet is control device able to send and receive messages on DALI bus. Except of standard messages user messages with various length can be sent and received.

DALInet supports Multimaster communication (more master devices can communicate on DALI bus). Control device can send data at any time and collisions are solved by DALInet converter.

DALInet sends to control device all communication on DALI bus. Answers on DALI bus are sent to RS232 in one message together with appropriate query, even in case, that the query was sent by another device.

Control device is automatically informed about collisions on DALI bus (framing error) and other states (for example: short connection or main voltage on the DALI bus).

MODBUS


Using MODBUS TCP it is possible to command lights on the DALI bus. Controlled can be standard DALI ballasts and also extension for color management (RGB/RGBW) and color temperature (Tc) – DALI type 8.

To write values to DALInet, MODBUS function 16 (0x10) "Write multiple registers" is used. Choosing a register selects for which type of light will messages be send. Registers 1-162 are for standard DALI, 163-810 for DALI type 8 (color control).


By selecting a register can be determined message addressing on DALI. They can be sent as a Broadcast (to all units), to Group 0-15 or to specific address 0-63.

MODBUS register		DALI address	description	
1-2	1	Bcast	Standard DALI	Fade time (0-15)
	2			Direct arc power control level (DAPc 0-254)
3-34	3+x*2	Group x		Fade time (0-15)
	4+x*2			Direct arc power control level (DAPc 0-254)
35-162	35+x*2	Address x		Fade time (0-15)
	36+x*2			Direct arc power control level (DAPc 0-254)
163-170	163	Bcast		Fade time (0-15)
	164			Direct arc power control level (DAPc 0-254)
	165			Red (0-254)
	166			Green (0-254)
	167			Blue (0-254)
	168			White (0-254)
	169		Amber (0-254)	
	170		Freecolor (0-254)	
171-298	171+x*8	Group x	Fade time (0-15)	
	172+x*8		Direct arc power control level (DAPc 0-254)	
	173+x*8		Red (0-254)	
	174+x*8		Green (0-254)	
	175+x*8		Blue (0-254)	
	176+x*8		White (0-254)	
	177+x*8		Amber (0-254)	
	178+x*8		Freecolor (0-254)	
299-810	299+x*8	Address x	Fade time (0-15)	
	300+x*8		Direct arc power control level (DAPc 0-254)	
	301+x*8		Red (0-254)	
	302+x*8		Green (0-254)	
	303+x*8		Blue (0-254)	
	304+x*8		White (0-254)	
	305+x*8		Amber (0-254)	
	306+x*8		Freecolor (0-254)	
811-813	811	Bcast	DALI type 8 RGBWAF (Color)	Fade time (0-15)
	812			Direct arc power control level (DAPc 0-254)
	813			color temperature (Tc) = 1000000 / T[K]
814-861	814+x*3	Group x		Fade time (0-15)
	815+x*3			Direct arc power control level (DAPc 0-254)
	816+x*3			color temperature (Tc) = 1000000 / T[K]
862-1053	862+x*3	Address x		Fade time (0-15)
	863+x*3			Direct arc power control level (DAPc 0-254)
	864+x*3			color temperature (Tc) = 1000000 / T[K]

Signaling		
ETH	Connection on Ethernet network	
100M	Ethernet speed	
	Indication Off	10Mbit
	Indication On	100Mbit
TxDALI	Data sending on DALI bus / connection error	
	 blinking signalize outgoing messages on DALI bus	
	 regular flashing in 1 sec interval signals error of unit connection (if RxDALI is off) • disconnected DALI bus • defective DALI bus power supplier (e.g. common current source) • mains voltage 230V has been connector to the DALI bus • low supply voltage	
RxDALI	Incoming communication on DALI bus	
	 Switching off signals incoming data on DALI bus	

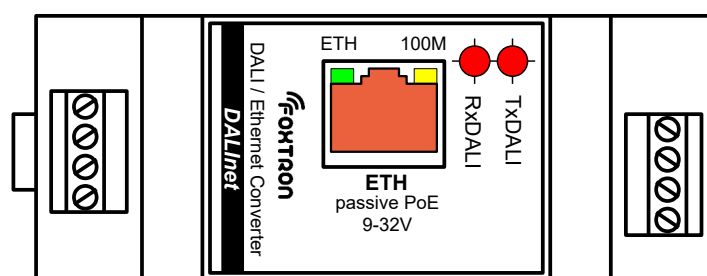


Terminals connection

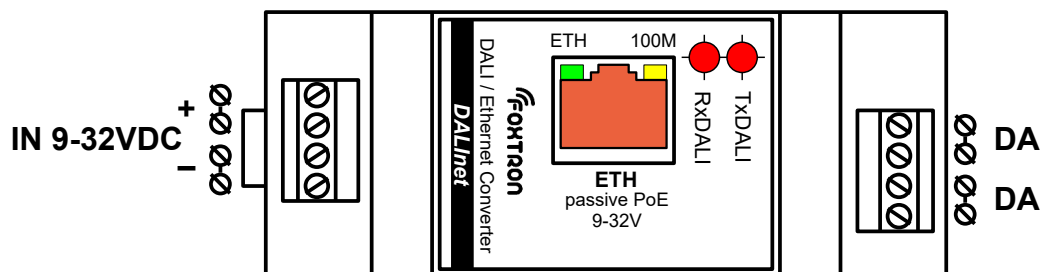

Designation	Description
DA/DA	DALI bus, two inputs mutually interchangeable
ETH	Ethernet, passive PoE power supply
IN 9-32VDC	External DC supply 9-32V (alternative to PoE)

Conductor preparation:



Power supply

This unit has two options of power supply. Passive PoE or external power supply on terminals.

IN 9-32VDC. Consumption is in both cases 1,5W (supply current is dependent on connected supply voltage).

Passive PoE	Power supply is connected together with Ethernet on ETH connector. Power supply is inserted into the data cable via common passive PoE injector. Supply voltage can be in range 9-32V.
IN 9-32VDC	DC voltage 9-32 on terminal „IN 9-32VDC“

Protocol

Data are sent to converter via TCP/IP protocol. Message format is stated in separate document called „DALI communication protocol.pdf“ which can be download on www.foxtron.eu.

Setup

The DALInet converter is configured using the FoxNetFinder program, which can be downloaded free of charge from the **Support** tab on the Foxtron.cz website. Press the Find button to find a specific DALInet (the default IP address is 192.168.1.241). You can change the IP address using the New IP line in the FoxNetFinder program and save it to DALInet by pressing the Send new IP button. After saving, we recommend reading all devices again using the FoxNetFinder program and verifying that the IP address has been changed correctly.

Device Name (for DHCP)	Name of DALInet converter for DHCP server
Addressing Mode	Static – manual setup of IP address
	DHCP – automatic setup of IP address thanks to DHCP server
Device IP Address	IP address of DALInet converter (for Addressing Mode = Static)
Device Subnet Mask	Net mask
Device Gateway	Default gateway
DNS Server	Address of the domain server
Ethernet Link	Normal – automatic speed choice
	100BT Half duplex – Ethernet speed 100Mbps
	10BT Half duplex – Ethernet speed 10Mbps

Dimensions (v mm)

